

An OCXO for 5G Network and Test Applications

It delivers precise ultra low phase noise

Features

- SC-cut crystal
- High Stability
- Low Aging
- Ultra Low Phase Noise
- Extraordinary (E) -91 dBc/Hz at 0.1 Hz
 -123 dBc/Hz at 1 Hz
 -151 dBc/Hz at 10 Hz
 -172 dBc/Hz on the floor
- Sine Wave output +14 dBm TYP
- 36x27 mm “Europack”




Applications

- Instrumentation
- Telecommunication systems
- COTS/Dual use
- GPS
- Radar


Specifications

Evaluation Unit? Contact NEL

10 MHz Output Frequency

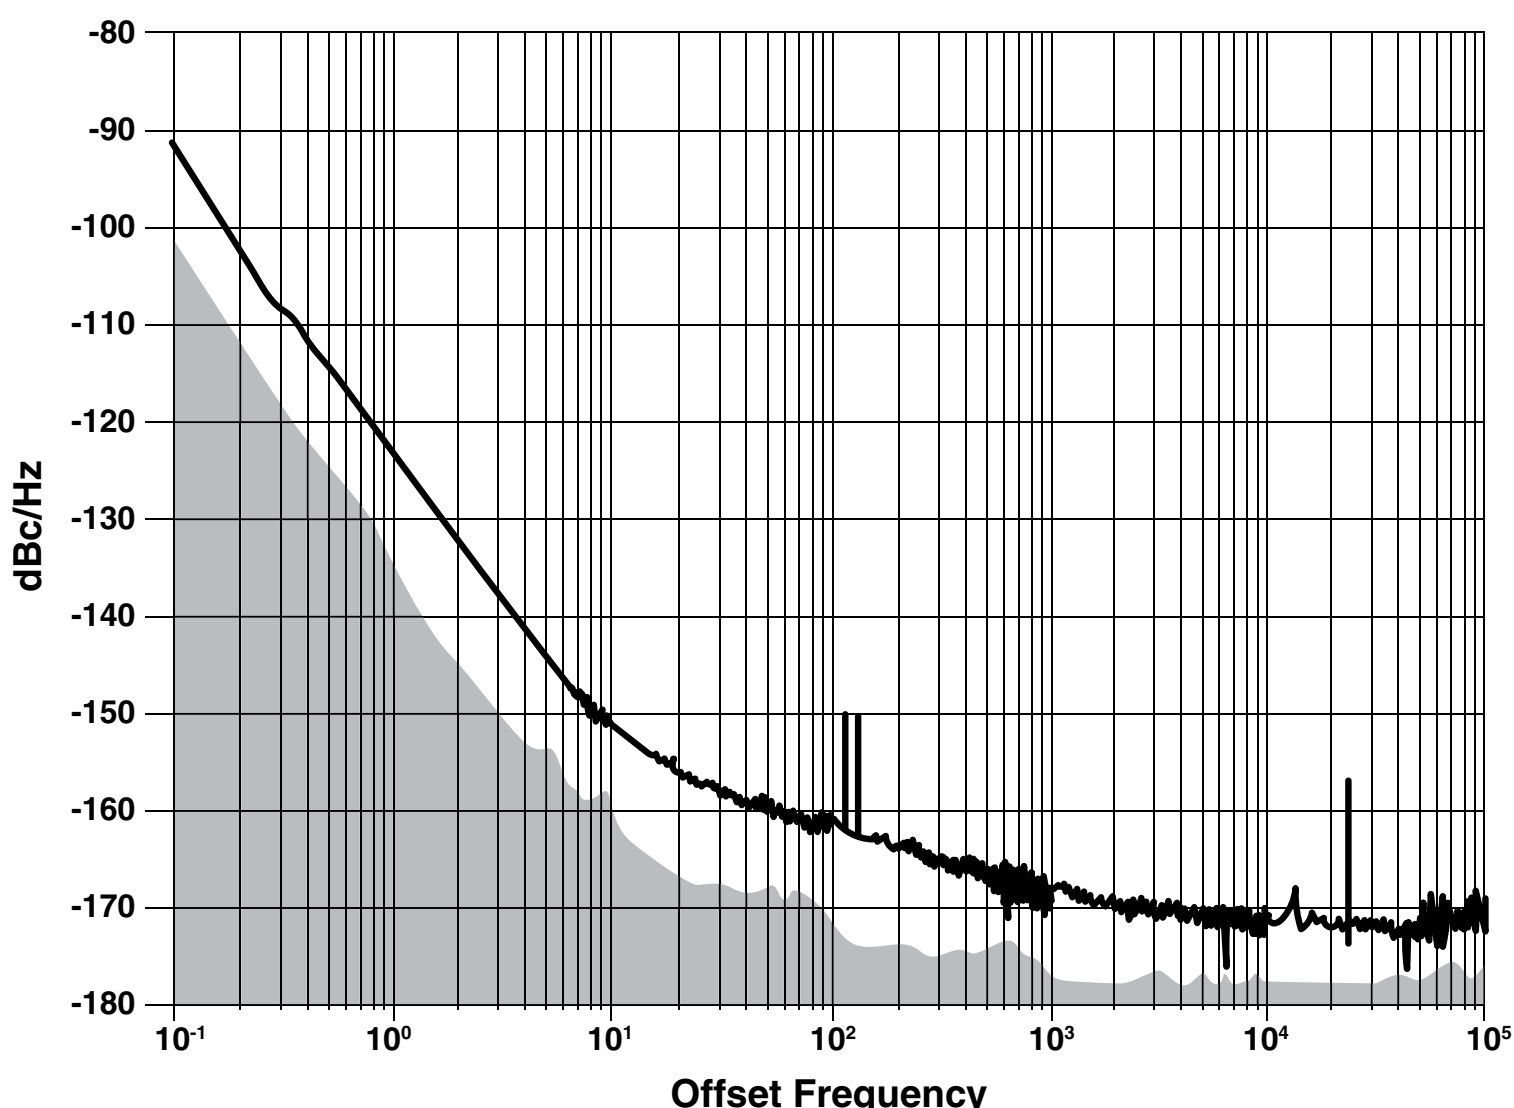

ADEV

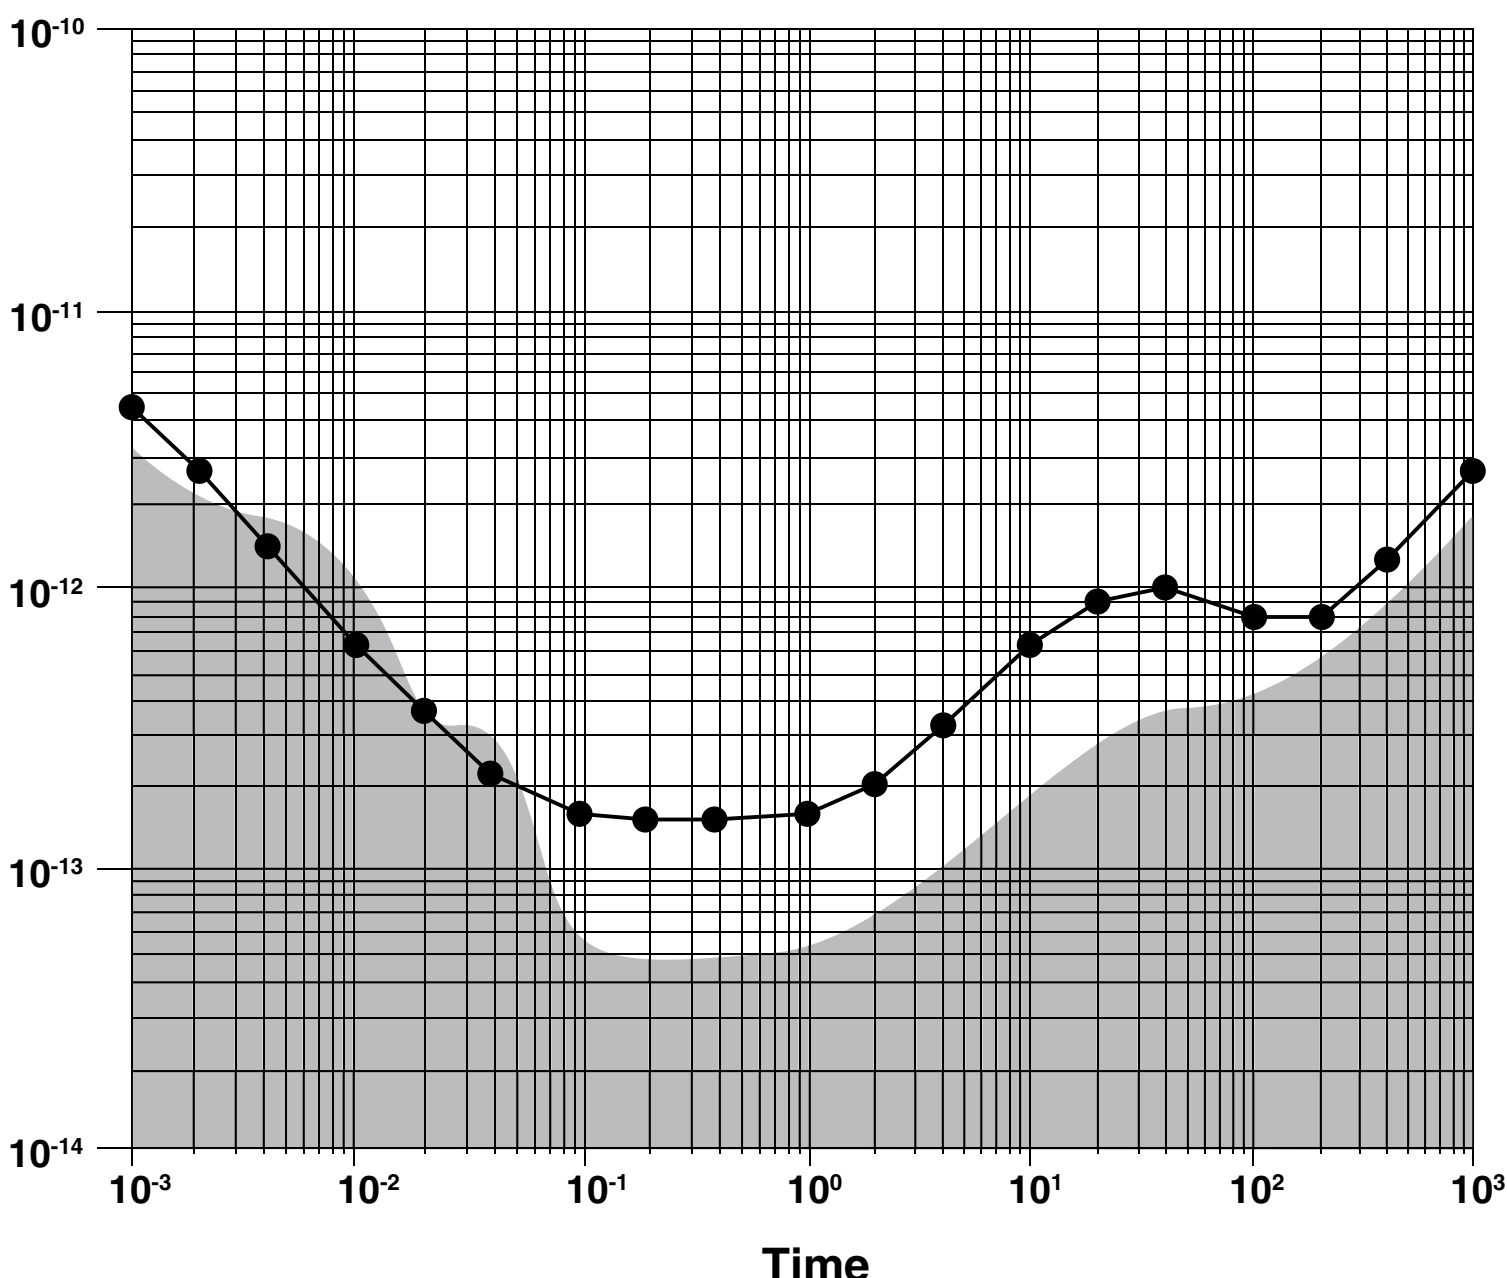

Follow us on LinkedIn for updates on industry news!